Arbo Engineering Inc
3 Whitehorse Rd, Unit 4&5
Toronto, ON M3J 3G8
Canada

Tel (416) 636-7057
Fax (416) 630-9135

KDA-VS/28 Convertible Screw Feeder

Arbo's KDA-VS/28 twin screw feeder is ideal for low to moderate feed rates with a wide variety of materials. With a snap-off hopper to facilitate cleaning the VS/28 is easily converted to a single screw feeder. The internally driven horizontal hopper agitator makes the VS/28 suitable for more difficult materials which have a tendency to bridge or rathole. Special screw designs are available for materials from free flowing to sticky and cohesive.

The nominal capacity of the VS/28 is from around one half to several hundred pounds per hour depending on material density, flow characteristics and screw selection.

Capacity: ~ up to 10 ft^3 per hour	Hopper Capacity: 0.53 ft^3	Drive Motor: 0.5 hp (0.33 kw)
Agitator Motor: gear drive	Material: Type 304 Stainless	Screw Selection: Ø24 to 26mm

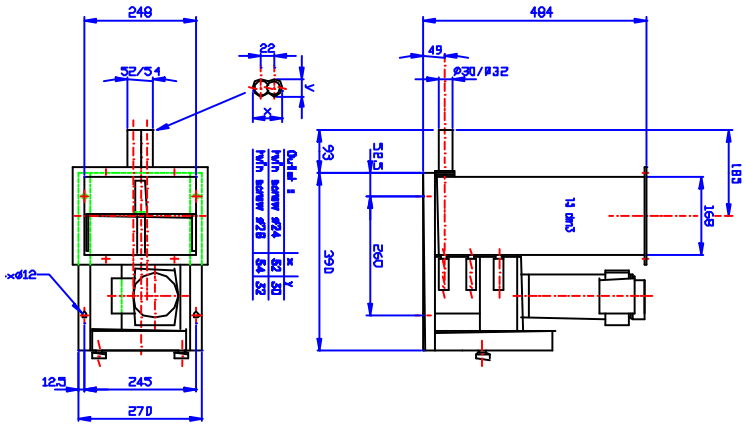

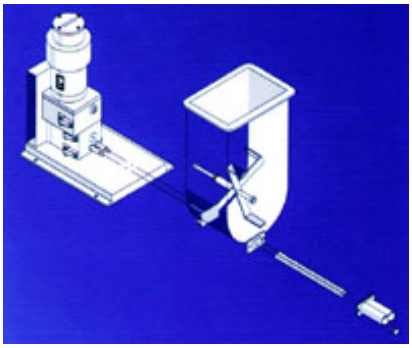

Options:

Gravimetric adaptation	Horizontal or vertical outlet	Hopper cover with quick clamp
Hi speed version	Water cooled hopper & outlet	Protective grid on hopper inlet